

PowerScan™ LR & XLR

Industrial Bar Code Scanners



Ideal for:

- Forklift Scanning Applications
- Warehousing & Outdoor Use
- Inventory Control
- Heavy-Duty Manufacturing

Features:

- Operating range from 5" / 13 cm to 36' / 11 m
- Robust for tough industrial applications
- Flexible & extensive interface capabilities
- Positive trigger feedback for gloved hand operation
- Integrated metal tether hook
- Programmable beeper tone & volume
- Variety of flexible mounting & storage accessories available


The Premier Long Range & Extra Long Range Industrial Performance

The PowerScan LR and XLR scanners have been specifically designed "from the ground up" to meet the demands of tough industrial applications – especially where some labels are scanned up close and others at great distances. The PowerScan LR will read a standard 13 mil UPC label as close as 7" / 18 cm and a 100 mil reflective label 22' / 671 cm away. With the XLR model you can read 15 mil labels as close as 28" / 71 cm and 100 mil reflective labels as far away as a whopping 36' / 11 m.

In any long-range application, you can rely on either the PowerScan LR or XLR for fast, accurate bar code reading of both paper and reflective labels. PSC's QuadraLogic™ II decoding software enables users to successfully read most dirty, smudged and damaged labels...labels that were previously considered unreadable.

Dependable In The Harshest Conditions

Even in the harshest working environments, you can depend on the PowerScan LR & XLR to keep on working. Designed to meet the most stringent drop specification in the industry, the scanner will withstand multiple 6.5' / 2 m drops to concrete. Even dust and moisture won't phase it. In fact, the PowerScan LR and XLR scanners have a rating of IP54, which means they meet or exceed the sealing rating of every portable host terminal on the market. And don't worry about weather conditions – the PowerScan LR and XLR scanners operate in bone-chilling blizzards, down to -22°F / -30°C and scorching desert heat, up to 122°F / 50°C.

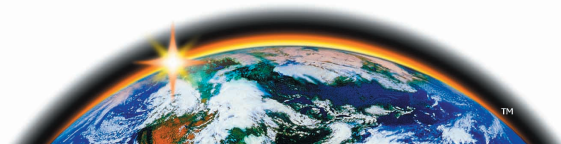

PRODUCT

Mechanical

Dimensions: 2.7 x 4.4 x 7.2" / 6.9 x 11.2 x 18.3 cm

Weight

Scanner: 9.9 ozs. / 280 g
Cable (32"/81 cm): 6.2 ozs. / 176 g

Cable length option

Collapsed: 32" / 81 cm,
Max. Working: 72" / 183 cm;
Collapsed: 80" / 203 cm,
Max. Working: 120" / 305 cm

(For other cable options, contact your PSC sales representative.)

Electrical

Operating voltage: 4 VDC to 14 VDC

Operating current – nominal

Undecoded: 95mA @ 5 VDC

Decoded: 100mA @ 5 VDC

Idling current – low power mode:

<50µA @ 5 VDC

Optical

Light source: Extra Bright 650nm Visible Laser Diode (VLD)

Scan system: Frictionless lifetime flexure mechanism

Rate: 37 scans/sec. nominal

Depth-of-field: Refer to chart on this page

Print contrast ratio: 25% minimum

Pitch: ±65°

Skew: ±55°

Ambient light immunity

Artificial light: 1,200 foot candles / 12912 Lux
Sunlight: 8,000 foot candles / 86080 Lux

Environmental

Temperature rating

Operating: -22° to 122° F / -30° to 50° C

Storage: -40° to 158° F / -40° to 70° C

Humidity: 5 to 95% NC

Shock (at 23°C): withstands multiple 6.5' / 2 m drops to concrete

Vibration: meets MIL-STD-810E

Water & Dust: IEC529 rating IP54DW

Decoding Capability

(autodiscriminates between)

UPC A, E / EAN 8,13 / JAN 8,13
(P2 / P5, Code 128 EAN add-ons)

Code 128 Codabar

Code 39 Interleaved 2 of 5

Code 39 Full ASCII Standard 2 of 5

Code 93 MSI / Plessey

Pharmacode 39

BC412 (available upon request)

Communications

Undecoded: Standard and Intermec-compatible

Multi-interface modules (interchangeable, AutoSelect™ cable determines active interface):

RS232C / Standard Keyboard Wedge /

Wand Emulation

Universal Keyboard Wedge / RS232*

IBM 46XX / RS232C

*This RS232 interface only supports RXD and TXD, no control signals are available.

Safety & Regulatory

Electrical: Complies to Gost R; TÜV; UL; cUL

Emissions: Complies to FCC-A; EN 55022-B

BCIQ CNS13438; AS/NZS 3548; VCCI-B

Laser classification: CDRH Class II (LR),

CDRH Class IIIA (XLR);

(CAUTION: Laser Light –

Avoid direct eye exposure);

IEC 60825 Class 2 (LR & XLR)



Depth-of-Field Chart – (printing resolution, contrast and ambient light dependent)				
Label Density	Long Range (decoded, Code 39)		Extra Long Range (decoded, Code 39)	
	Range		Range	
Paper Labels	7.5 mil	8" to 13" / 20 to 33 cm		
	10 mil	7" to 20" / 18 to 50 cm		
	15 mil	7" to 32" / 18 to 80 cm	3.3' to 5.0' / 101 to 152 cm	
	20 mil	5" to 4' / 13 to 122 cm	2.3' to 6.0' / 71 to 183 cm	
	40 mil	8" to 7' / 20 to 213 cm	2.3' to 12.0' / 71 to 366 cm	
Reflective Labels	55 mil	15" to 9' / 38 to 274 cm	3.3' to 15.0' / 101 to 457 cm	
	40 mil	22" to 8.3' / 56 to 254 cm	3.3' to 15.0' / 101 to 457 cm	
	70 mil	3.3' to 15.0' / 101 to 457 cm	6.7' to 24.0' / 204 to 730 cm	
	100 mil	3.8' to 22.0' / 116 to 671 cm	6.7' to 36.0' / 204 to 1097 cm	

Accessory mounts also available



Specifications are subject to change without notice.
Additional information concerning this product or other PSC products and services can be found at the PSC website: www.pscnet.com, or contact your PSC representative for more information.



Switzerland • OPAL Associates AG • Motorenstrasse 116 • CH-8620 Wetzikon • Telefon +41 (0)1 931 12 22 • Telefax +41 (0)1 931 12 20 • Email info@opal.ch • OPAL Associates SA • Avenue des Boveresses 54 • Case postale 29 • CH 1000 Lausanne 21 • Telefon +41 (0)21 653 95 00 • Telefax +41 (0)21 653 95 02 • Email info@opalsa.ch • Germany • OPAL Associates GmbH • Lohnerhof-Str. 2 • D-78467 Konstanz • Telefon +49 (0)7531 813 000 • Telefax +49 (0)7531 813 00 99 • Email info@opalgmbh.de • OPAL Associates GmbH • Osterholder Allee 2 • 25421 Pinneberg • Telefon +49 (0)4101 787 615 • Telefax +49(0)4101 787 616 • Email hamburg@opalgmbh.de • Austria • OPAL Associates GmbH • Vorarlberger Wirtschaftspark • A-6840 Götzis • Telefon +43 (0) 5523 58833 • Telefax +43 (0)5523 521569 • Email info@opalgmbh.at

